



Undervoltage release 208-230 V AC 50/60 Hz accessory for 3VA1 and 3VA20 up to 3VA25

Versiyon		
ürün marka adı	SETRON	
ürün tanımı	Aksesuar	
ürün modeli	Yardımcı tetikleyici	
Genel teknik veriler		
Kirlilik derecesi	3	
Aşırı voltaj kategorisi	III	
alınan görünür güç / maksimum	2 V·A	
Gerilim		
şok gerilim mukavemeti	4 kV	
Mekanik Tasarım		
Yükseklik	65,1 mm	
Genişlik	25,7 mm	
yuva sayısı	3	
derinlik	28,8 mm	
net ağırlık	91 g	
Bağlantılar		
sıkma torku [lbf·in] / vida bağlantısında		
• minimum	3,5 lbf·in	
• maksimum	4,4 lbf·in	
sıkma torku / vida bağlantısında		
• minimum	0,4 N·m	
• maksimum	0,5 N·m	
bağlanabilir kablo kesiti		
• minimum	0,5 mm ²	
• maksimum	1,5 mm ²	
izolasyon sıyırma uzunluğu	10 mm	
AWG numarası / kodlanmış bağlanabilir iletken kesiti olarak / yardımcı kontaklar için		
• minimum	20	
• maksimum	16	
izolasyon sıyırma uzunluğu [inç]	0,4 in	
Sertifikalar		
General Product Approval	EMC	Declaration of Conformity



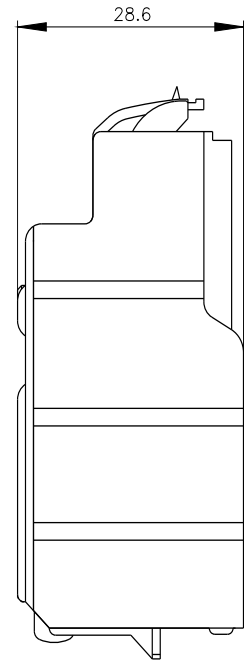
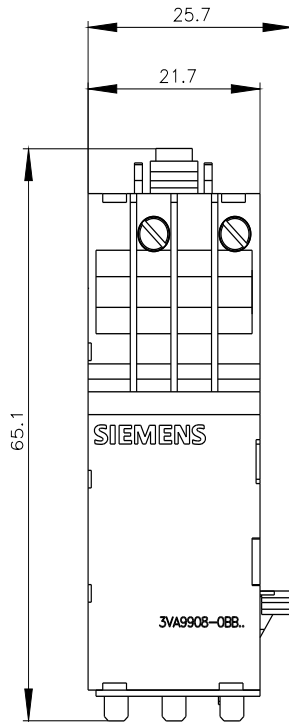
Miscellaneous

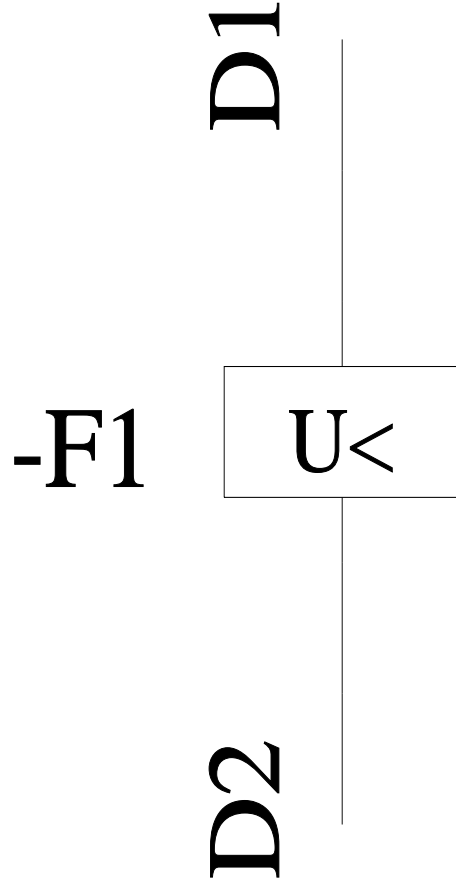


UK Declaration of Conformity

[Miscellaneous](#)[Type Test Certificates/Test Report](#)

LRS

[Miscellaneous](#)[Miscellaneous](#)**Diğer bilgiler****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/tr/tr/Catalog/product?mlfb=3VA9908-0BB25>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/tr/ps/3VA9908-0BB25>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9908-0BB25**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**<http://www.siemens.com/specifications>



Son deęişiklik:

20.12.2020 